
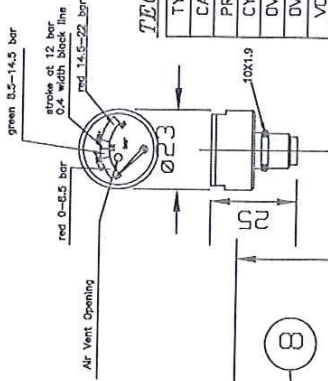


16



TECHNICAL SPECIFICATION

TYPE OF EXTINGUISHANT	Water Type
CAPACITY	9.0L +0%, -5%
PROPELLANT	Nitrogen
CYLINDER DIAMETER(ØD)	Ø181.0 ±1.0mm
OVERALL HEIGHT (H)	635.0 ±5.0mm
OVERALL WEIGHT	13.6kg +0%, -5%
VOLUME	11.4L
MATERIAL THICKNESS(CYL)	1.6mm
MIN. TENSILE STRENGTH	280N/mm ² (280mpa)
MIN. TEST PRESSURE	25bar (362.5psi) min 30s
MIN. BURST PRESSURE	65bar (942.5psi)
WORKING PRESSURE	12 bar (174 psi)
DISCHARGE TIME	63 - 67 sec
MIN. DISCHARGE RANGE	5 metres
CLASS OF FIRE	13A
TEMPERATURE RANGE	+5°C To +60°C
DESIGN	Manufactured And Approved To EN-3
FINISHING	High Gloss Red Powder Coating

* - Not shown in drawing

ITEM	PART NO	DESCRIPTION	QTY
1	CTN101-PP-SLT	CARTON BOX 9L WATER EURO	150/M ² /M BAF
2	FEC292-MS	CYLINDER BRACKET	MILD STEEL
3	FEC094-RB-BK	BASE SKIRTING	RUBBER
4	DR5014-RB-BK	DRING Ø14(I.D 12.42 x 1.78)- ADAPTOR	NITRILE 70
5	FEX002-MS-TIP5-ZP	BRACKET SLT	GALV. MILD STEEL
6	FEC183-PS-SLT	STRAINER	ABS
7	FEC017-PS-SLT-RD	CYLINDER BELT 9L	P.P BLACK-600G
8	FEC051-PS-SLT	DIP TUBE 9L (STORE TYPE - 480.0mm)	P.V.C
9	FEC003-MS-SLT-RD	CYLINDER 9L WATER TYPE	COLD ROLLED STEEL
10	FEC093-MS-M45	NECK RING M45	MILD STEEL
11	FEC166-012-GR	PRESSURE GAUGE 12BAR DIAPHRAGM GR	-
12	FEC116-SS	SAFETY PIN	STAINLESS STEEL
13	FEC117-PS-EN	PULL TAG BROOKS-EN	P.P
14	FEC096-MS-EN	BASE RING	MILD STEEL
15	FEC181-PS-SLT	DISCHARGE NOZZLE 9L (ORF-Ø3.0)	NYLON
16	FEC027-LA	CLIP	ALUMINIUM
17	FEC007-PS-SLT-BK	DISCHARGE HOSE LGTH 486.0mm 9L	NR6 B045/YARN 3000D
18	DR5219-RB-BK	M45-ORING 219(I.D 32.92 x 3.53)	NITRILE 70
19	FEC054-PS-BK	ADAPTOR	NYLON
20	FEC055-GM-M45-RD	M45 VALVE - RED	CHROME FORGE BRASS CZ122

UNLESS OTHERWISE STATED
DIMENSION IN MILLIMETRES
TOLERANCE
LINEAR: ±0.20
ANGULAR: ±0.5

REVISION: 04

Q.A. Dwg. *[Signature]*

Q.A. MGR *[Signature]*

FAC. MGR *[Signature]*

ISSUED 20 MAR 2019

DRW. NO. FEESUVT - VIK

ARTICLE NO. 1065699

MATERIAL: *[Blank]*

FINISH: RED

STEEL RECON INTD. SDNY. BIED.

PRODUCT: EURO FIRE EXTINGUISHER

TITLE: 9L EURO WATER TYPE ASSEMBLY

